



XSD




C  US
E499553



FC




ORIGINAL



9 IN 1
Switchable



INFORMATION

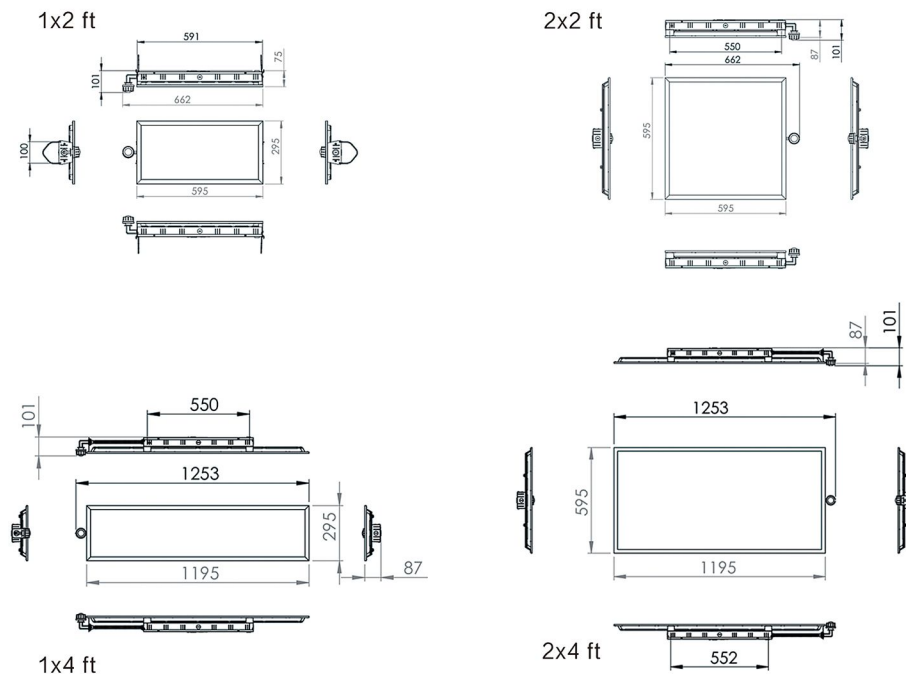

XSD-PL0603 series

Model No.	Size (mm)	Power (W)	Voltage (V)	Lumen efficacy (lm)	CCT	PF	CRI	THD	Lifetime (hours)	Installation
□ NA-12FT100W-HB	303x603	100	120-347	13500	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-12FT130W-HB	303x603	130	120-347	17550	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-12FT150W-HB	303x603	150	120-347	20250	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-14FT150W-HB	303x1213	150	120-347	20250	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-14FT200W-HB	303x1213	200	120-347	27000	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-22FT150W-HB	603x603	150	120-347	20250	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-22FT200W-HB	603x603	200	120-347	27000	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
□ NA-24FT300W-HB	603x1213	300	120-347	40500	3500K/4000K/5000K	>0.9	>80	<20%	50000	Suspended
Optional Function	☐ 3 Powers ☐ 3CCT ☐ Wireless dimming function ☐ Sensor function ☐ Emergency function									

product details



Warm
and
comfortable



